



TM200C

Sectional Insulated Steel Door




THE SAME GREAT QUALITY AND DURABILITY YOU GET FROM ALL THERMASEAL MODELS, WITH THE ADDED BENEFIT OF 13 TRENDY AND TIMELESS COLORS TO CHOOSE FROM.



The swatches shown on monitors and printed materials may vary from the actual color. For a true representation of the color, visit your local Raynor Dealer.

- Sections are evenly filled using a computer-controlled continuous process with a CFC free NeuFoam™ polyurethane insulation
- NeuFoam™ insulation is zero-ozone depleting and provides higher thermal properties which result in significant energy savings
- Cavity-free, uniform insulation ensures excellent adhesion to the sheet metal, resulting in an exceptional strength to weight ratio that qualifies for a wide range of applications
- Raynor's trademark full WeatherLock™ perimeter weather sealing system
- Sections fabricated from pre-painted, hot dipped galvanized steel sheets with rigid polyurethane insulation core, face sheet stucco embossed and pencil groove
- Sections feature a thermal break between the interior and exterior steel skin
- Authorized Dealers and Installers located in over 40 countries around the globe; retrofit and individual door section replacements available up to 20'2"

Product Specifications

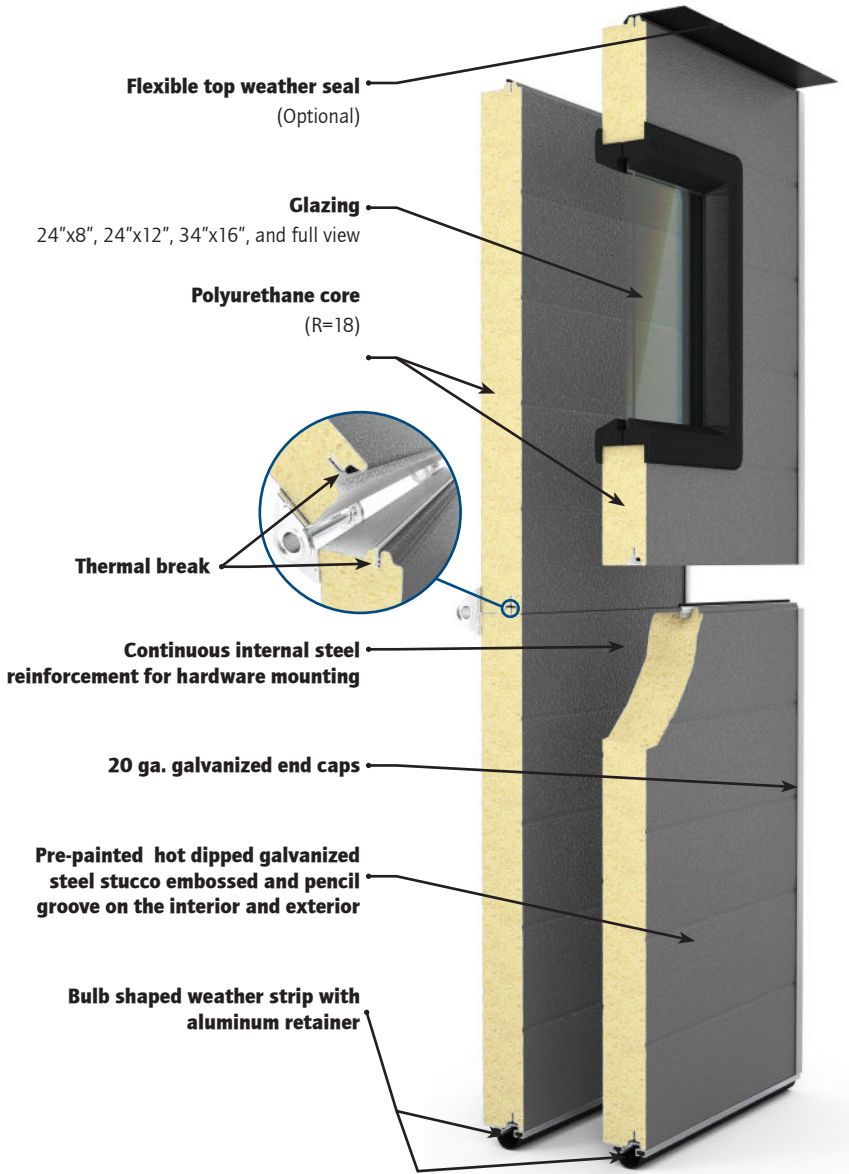

Door Opening Width	Max no. of Windows
4'0" to 5'11"	1
6'0" to 9'2"	2
9'3" to 12'2"	3
12'3" to 16'2"	4
16'3" to 20'	5


Section Details

3/8" tongue and groove, foamed-in-place polyurethane insulation, thermal break. 20-gauge continuous reinforcing strip at top and bottom edge for hardware attachment.

Total Door Thickness:	2"
Thermal Value of Sections:	R-18
Face Sheet Pattern:	Exterior: Pencil groove Interior: Pencil groove
Face Sheet Texture:	Exterior: Stucco Interior: Stucco
Face Sheet Thickness:	Exterior: 26-Gauge Interior: 27-Gauge
Section Heights:	21", 24"
Maximum Opening Width:	20'
Maximum Opening Height:	16'
Finish:	Two coat, baked-on paint system on exterior side, primer and polyester finish coat.


Glazing Options

24"x8"




24" x 8" sealed glass unit set in molded frame

24"x12"




24" x 12" sealed glass unit set in molded frame

34"x16"



34" x 16" sealed glass unit set in molded frame

Aluminum Full View



1/8", 3/16", 1/4", 1/2" and 1" glass options

Warranty

10 years against delamination of the panels
1 year on materials and workmanship

Professionally installed and serviced by: